

7000 Series Impact or Non Impact Sliding Glass Door System

Featuring 2 - 3 & 4 Track Sliding Glass Door Systems

Design Loads IMPACT:

Reinforced Design Pressures up to **+75 / -75**

Non-Reinforced Design Pressures **+60 / -60**

Design Loads Non-IMPACT:

Reinforced Design Pressures up to **+75 / -90**

Non-Reinforced Design Pressures **+60 / -67.5**

Perfect For The Replacement Industry, The New Home Builder and The Condominium Market.



Panel Sizes Up To 5'0 x 8'2-inch High Door Systems:

Available in Bypass & Pocket door units with multi configurations.

Impact / Security Tested: With WinDoor Incorporated you not only protect your home in severe weather but you also receive **Intruder protection**. Our glazing systems utilizing DuPont's Sentry Glass® Interlayers for **Impact Protection**. They can in addition, provide increased comfort and energy efficiencies that will **Save You Money**.

Low - E Glass Options: Offering a wide range of low-e glass choices (See glass chart available from your local WinDoor, Inc dealer).

Color Finishes:  White & Bronze also available in South Beach Silver Clear Anodized 215 Class 1. AAMA 2603, 2604* and 2605 Custom Color Match Finishes always available.

Pull Handles: The EURO Handle System Standard Metal full-size interior and exterior handles available in a variety of colors. Featuring a large easy to operate pull handle.



Euro Handle

Locking Systems Anti-Slam: Adjustable stainless steel dual-point mortise locks provide Level 10 Forced Entry Resistance as tested to AAMA standards. Secondary locking system available, exterior key lock available as well.*

Roller Systems: Stainless steel housed adjustable tandem rollers with 1-5/8" Delrin® wheels allows doors to operate easily and quietly.



Tested for High Performance Capabilities: Miami-Dade, AMMA/NWDA & ASTM Certified To Heavy Commercial Standards - Our Sliding Glass Doors not only meets the most stringent of Miami/Dade product approvals TAS 201, TAS 202, TAS 203, Florida State Wide Product Approvals & (TDI) Texas Department of Insurance... We also tested ASTM E-1300, E-1886 & E-1996 with AAMA 506 impact codes required by states in the United States of America.



7500 Amsterdam Drive Orlando, Florida 32832

*Some of the product features are options. Please see your authorized WinDoor, Inc. Dealer for details.

407.481.8400 www.WinDoorInc.com
See back for more details

WinDoor 7000 Series Sliding Glass Door System

Non-Impact Tested
 (Panel Size 5'0 x 8'2) 3/16" & 1/4" Tempered Glass
 Single Glazed or 3/4" Insulated.
 (Panel Size 5'0 x 8'2) With aluminum reinforcing

Light Commercial Ratings	Design Pressures Up To
LC-45	+60 / - 67.5
LC-60	+75 / - 90

Impact/Security Tested
 Panel Size 5'0 x 8'2) 7/16" & 9/16" Single glazed
 annealed or heat strengthened laminated.
 (Panel Size 4'0 x 8'2) Insulated 3/4" tempered
 laminated.


Light Commercial Ratings	Design Pressures Up To
LC-45	+60 / -60
LC-60	+75 / -75

7000 Series Sliding Glass Door Spec Data Sheet

Master Frame: Installation trim pack for versatility installation for new construction or retrofit. Beauty caps to conceal stainless steel fasteners.

Screens: Heavy-duty standard box exterior screen with frame depth of 1-1/8" x 2-5/8". Featuring adjustable stainless steel 1-5/8" Delrin® wheels. Featuring: **BETTER VUE** Screens (Standard)

Muntins*: Inside and outside muntins enhance the design. Internal muntins available for insulated glass panels.



Dual Fin-Seal Weather-stripping: Two sets of polypropylene fiber weather stripping concealed in panel perimeters. Keeps the elements out and reduces energy costs year after year.

True Coastal Hardware Locking Hardware and Rollers: In stainless steel to insure trouble-free operation in salt air environments.

Impact-Resistant Glazing: Large missile 7/16" & 9/16" single glazed and 3/4" tempered insulated glass. Protects against damage caused by windborne debris and intruders, and greatly reduces sound transmission. Eliminates the need for unsightly and inconvenient storm shutters. We call it... Passive Protection 24/7

Non-Impact Glazing: Tempered glass 3/16" & 1/4" and 3/4" tempered insulated glass for locations not requiring impact glazing.

Internal Structural Reinforcement: 6061-T6 aluminum alloy reinforcement added to maintain both the architectural design integrity and provide higher design pressures.


Panels: have a depth of 1-5/16" with 4" wide stiles and rails.



XO, OX, XX



OXO, XXO, OOX, XOO, XXX

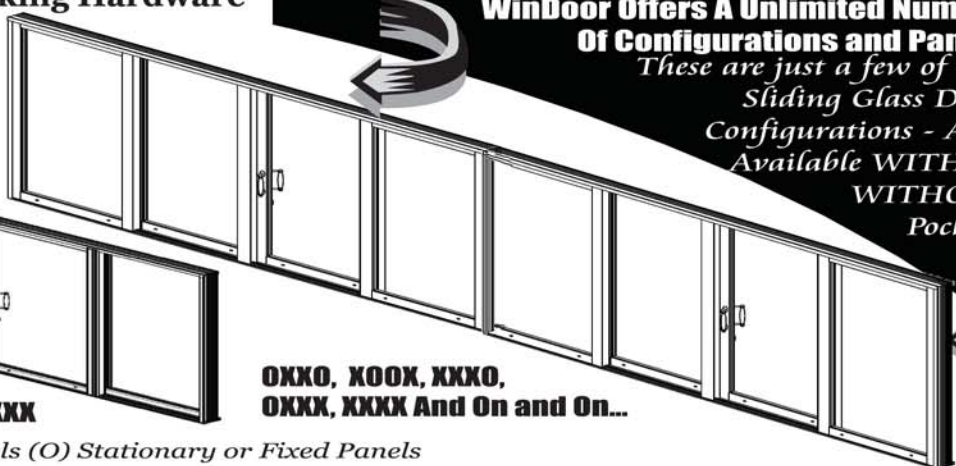

OXXO, XOOX, XXXO, OXXX, XXXX And On and On...

WinDoor Offers A Unlimited Number Of Configurations and Panels
 These are just a few of our Sliding Glass Door Configurations - Also Available WITH or WITHOUT Pockets.

(X) Operable Or Movable Panels (O) Stationary or Fixed Panels

SILL RISER OPTIONS



Whatever the demands of your specific location, we can provide the sill riser to handle the rain. (See the chart below.)

The 7000 Series Offers 2 Different Sill Riser Heights


Sill Riser Height	Lab Results
2- 1/2"	9.0 psf
3- 1/8"	11.26 psf

The 7000 Offers 3 Different Blade Track/Sill Options.

2-Track sill depth = 3- 9/16"



3-Track Sill Depth = 5- 1/2"



4-Track Sill Depth = 7- 1/2"

