

Thermally Broken

# Double Hung WinDow

It's like going back to the good old days... *But Even Better!*

### At - A - Glance

**Aluminum Frame  
Maximum**

**Size 60" x 99"**

AAMA / WDMA / CSA 101 / I.S.2 /

A440-05 H-AW 100 H-C 120

ASTM 1886 / 1996 / HVHZ

TAS 201, 201 & 203

Miami Dade - Texas Department of  
Insurance & Florida State Approvals.

**D.P's +120 / -150**

**Solar Heat Gain Coefficient**

**As Low As .12**

**U-Value**

**As Low As .37**

**STC Rating As High As 41**

**with Storm Sash 44**

**Water Performance**

**at 20 psf**

**WinDow Air Infiltration**

**.005 C or .024 AW**

The 9040 Double Hung WinDow System was designed with the same traditional details that was once found in the great architectural past, but with all of the **LATEST TECHNOLOGY** to make it even better for your new or restoration projects.

## Double Hung WinDow 9040 Series

Thermally Broken With The Latest I-Strut Technology

The WinDow profile is constructed directly into an architectural grade extruded THERMALLY BROKEN aluminum frame, and adds a traditional design dimension to the strength that will last for many years to come. Available with Impact or Non-Impact Glass.

The 9040 Double Hung WinDow can be mullied to other WinDoor products or used as a stand alone unit in a wide variety of configurations & custom sizes...  
**Even Bomb Blast Tested!**



Contact your authorized  
WinDoor Dealer for more information

**www.WinDoorInc.com**




WinDoor Incorporated 7500 Amsterdam Drive Orlando, Florida 32832  
407.481.8400

WinDoor Incorporated reserves the right to change materials design and or construction without notice or liability

# Aluminum Double Hung Window System

## Spec Data Sheet

Thermally Broken...  
With The  
Latest I-Strut Technology  
9040  
Double Hung  
WinDow

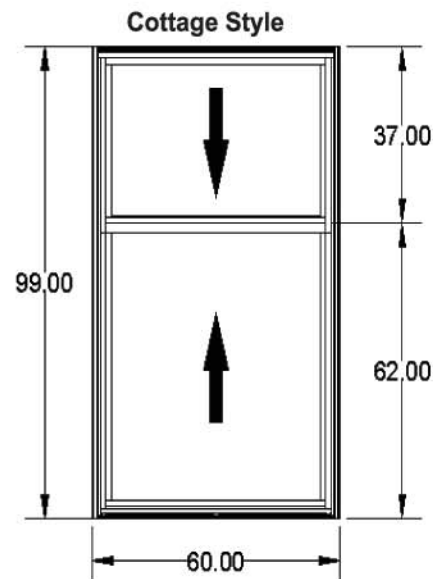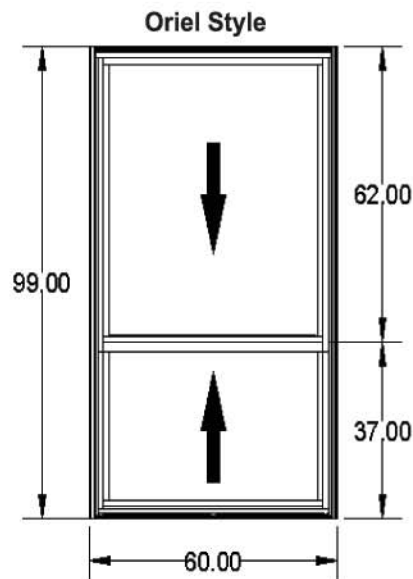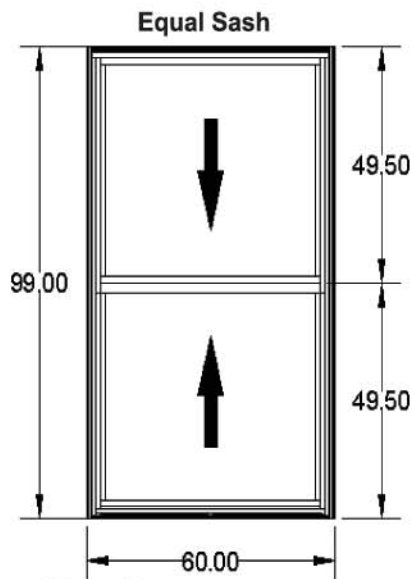

### Features:

- 1) Maximum WinDow Size 60" x 99"
- 2) Qualifying Single Glazed or Insulated Non-Impact
- 3) Qualifying Single Glazed or Insulated Large Missile Impact Glass
- 4) Qualifying Single Glazed or Insulated Small Missile Impact Glass
- 5) Our Standard Screen System ( BetterVue™ screens ) This incredible fiberglass screen lets you focus on the view outside instead of the screen in front of you.
- 6) Also available: Series 9043 WinDow Wall max size 60' x 144" Ask your WinDoor Dealer for details

### Mullion Types:

- 180 Degree
- 135 Degree
- Adjustable Bow Mull 12.5 Degree to 30 Degree

The above mullions can also be used with all new Thermally Broken Products

Series 9030 Fixed WinDow & the Series 9050 Terrace Door to create the capabilities of ...

**Double Hung - Fixed - Terrace Door - WinDow Wall Systems.**

(Ask your WinDoor Dealer for details )

### Performance:

- Air .005 C - .024 AW
- Water Test 20 psf
- NFRC Certifications:  
U-Values as low as .37  
SHGC (Solar Heat Gain Coefficient) as low as .12
- Acoustical Certifications:  
S.T.C = (Sound Transmittance Class) Rating = 39 with storm sash .44  
O.I.T.C (Outdoor - Indoor Transmittance Class) Rating = 34
- BOMB BLAST TESTED : A.T.F.P Anti-Terrorism Force Protection  
ASTM 1642-04 \ GSA TS01 Max Sized Tested 60" x 95 1/2"

# WinDoor

INCORPORATED

[www.WinDoorInc.com](http://www.WinDoorInc.com)

**Aluminum  
Thermally  
Broken  
Double Hung  
WinDow  
Systems**



TEXAS DEPARTMENT OF INSURANCE

WinDoor Incorporated reserves the right to change materials design and or construction without notice or liability