

# HORIZONTAL ROLLING WINDOWS

**WinDoor**  
INCORPORATED

**Horizontal Rolling Window  
8000 - 7000 & 6000 Series**

## ✓ **8000 Series Horizontal Rolling Window**

**IMPACT & NON-IMPACT Large & Small Missile  
Miami Dade - AAMA/NWDA & ASTM  
Tested to Heavy Commercial Standards HC- 70**

**Impact Design Pressures Up To: +120 -150 psf  
Non-Impact Design Pressures Up To: +120 -210 psf**

### **Features...**

#### **Window Sizes Up To 20' x 6'- 8" High**

Available with multi configurations.

**Impact-Resistant Glazing:** Large and small missile 9/16" single glazed and 1" insulated glass. Protects against damage caused by wind borne debris and intruders, and

greatly reduces sound transmission. Eliminates the need for unsightly and inconvenient storm shutters.

**Non Impact Glazing:** Tempered glass 3/16" & 1/4" single glazed and 1" tempered insulated glass for locations not requiring impact glazing.

**Internal Structural Reinforcement:** 6061-T6 aluminum alloy reinforcement added to maintain both the architectural design integrity and provide higher design pressures.

**Custom-Matched Colors:** Custom or two-tone paint can be matched to the color of any décor, both inside and outside.

**Finishes Paint Systems Compliant To:** AAMA 2603, 2604\* and 2605\* are warranted to resist cracking, chipping, peeling and fading.

## ✓ **7000 Series Horizontal Rolling Window**

**IMPACT & NON-IMPACT Large Missile  
Miami-Dade - AMMA/NWDA & ASTM  
Tested to Light Commercial Standards LC 60**

**Impact Design Pressures Up To: +75 -75psf  
Non-Impact Design Pressures Up To: +75 -90psf**

### **Features...**

#### **Window Sizes Up To 20' x 6'- 8" High:**

Available with multi configurations.

**Impact-Resistant Glazing:** Large missile 7/16" & 9/16" single glazed and 3/4" insulated glass. Protects against damage caused by wind borne debris and intruders. and greatly reduces sound transmission. Eliminates the need for unsightly and inconvenient storm shutters.

**Non Impact Glazing:** Tempered glass 3/16" & 1/4" single glazed and 3/4" tempered insulated glass for locations not requiring impact glazing.

**Internal Structural Reinforcement:** 6061-T6 aluminum alloy reinforcement added to maintain both the architectural design integrity and provide higher design pressures.

**Color Finishes:** Painted White & Bronze AMMA 2603 & 2605 also available in SouthBeach Silver Clear Anodized 215 Class 1. AAMA 2603, 2605 are warranted to resist cracking, chipping, peeling and fading.



## ✓ **6000 Series Horizontal Rolling Window**

**NON-IMPACT - AAMA/NWDA & ASTM  
Tested to Heavy Commercial Standards HC 45  
Non-Impact Design Pressures Up To +120 -125psf**

### **Features...**

#### **Window Sizes Up To 20' x 6'-8" High**

Available with multi- configurations.

**Non Impact Glazing:** Tempered glass 3/16" & 1/4" single glazed and 3/4" tempered insulated glass for locations not requiring impact glazing.

**Internal Structural Reinforcement:** 6061-T6 aluminum alloy reinforcement added to maintain both the architectural design integrity and provide higher design pressures.

**Color Finishes:** Painted White & Bronze AAMA 2603, are warranted to resist cracking, chipping, peeling and fading.

### **All Horizontal Rolling Windows Features**

**Roller Systems:** Stainless steel adjustable tandem rollers with 1-5/8" Delrin® wheels allows Windows to operate easily and quietly.



**Screens:** Heavy-duty standard box exterior screen with frame depth of 1-1/8" x 2-5/8". Featuring adjustable stainless steel 1-5/8" Delrin® wheels.



**Muntins\*:** Inside and outside muntins enhance the design. Internal muntins available for insulated glass panels.

**Locking Systems Anti-Slam:** Adjustable stainless steel dual-point mortise locks provide Level 10 Forced Entry Resistance as tested to AAMA standards. Secondary locking system available, exterior key lock available as well.\*

**Dual Fin-Seal Weather-stripping:** Two sets of polypropylene fiber weather stripping concealed in Window perimeters. Keeps the elements out and reduces energy costs year after year.

**True Coastal Hardware Locking Hardware and Rollers:** In stainless steel to insure trouble-free operation in salt air environments.

**Low - E Glass Options:** Offering a wide range of low-e glass choices ( See glass chart available from your local WinDoor, Inc dealer).




\*Some of the product features are options.

Please see your authorized WinDoor, Inc. dealer for details.

WinDoor Incorporated 7500 Amsterdam Drive Orlando, Florida 32832


Miami-Dade  AAMA/NWDA  & ASTM  Certified.

These are just a few of our WinDoor Configurations.

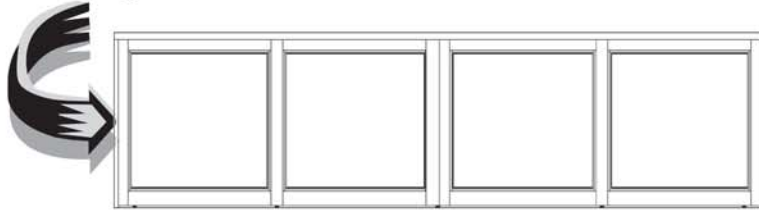


OXXO, XOOX, XXXO,  
OXXX, XXXX And On and On...

WinDoor Can Offer A Unlimited Number Of WinDow Configurations... Ask Your Dealer how we can help!.

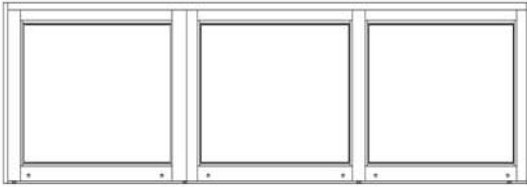

OXXO, XOO,  
OXX, XOO, XXX

Muntins Available

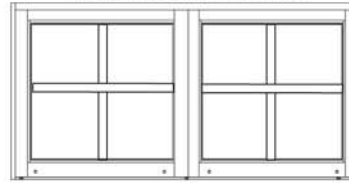


XO, OX, XX

(X) Operable Or Movable Panels (O) Stationary or Fixed Panels



### 8000 & 6000 Series SILL RISER OPTIONS

Controlling Water with a variety of sill riser heights; whatever the demands of your specific location, we can provide the sill riser to handle the rain. (See the chart below)

2-Track - NO Screen Sill Depth = 5- 1/8"

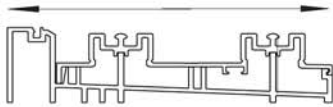


2-Track With Screen Sill Depth = 6- 5/8"

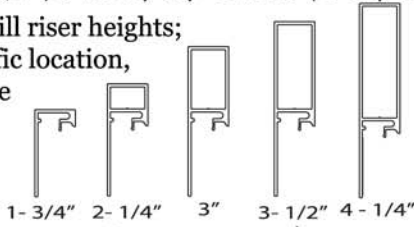


Sill Riser Height	Lab Results	Field Results
1- 3/4"	6.75 psf	5.25 psf
2- 1/4"	9.0 psf	7.50 psf
3"	12.0 psf	10.50 psf
3- 1/2"	15.80 psf	13.50 psf
4- 1/4"	18.75 psf	16.0 psf

Or Choose our blade sill options

2-Track - NO Screen Sill Depth = 4- 3/8"

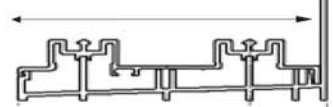

2-Track With Screen Sill Depth = 5- 7/8"

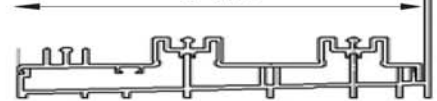


### 7000 Series SILL RISER OPTIONS

The 7000 Series Offers 2 Different Sill Riser Heights

Whatever the demands of your specific location, we can provide the sill riser to handle the rain.


(See the chart below.)

Sill Riser Height	Lab Results
2- 1/2"	9.0 psf
3- 1/8"	11.26 psf

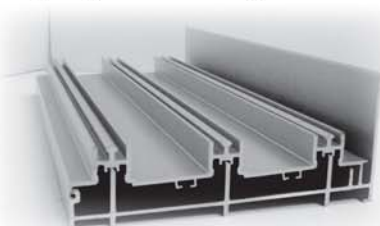


2 Different Track/Sill Options.

2-Track No Screen sill depth = 3- 9/16"

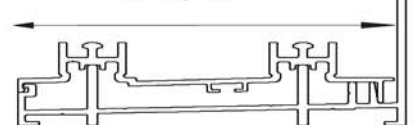

3-Track With Screen Sill Depth = 5- 1/2"

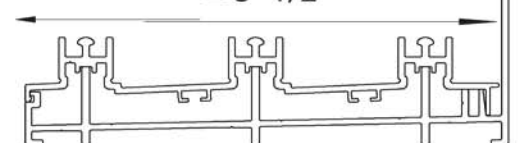

PROTECTING YOUR INVESTMENT

Beautifully

www.WinDoorInc.com